
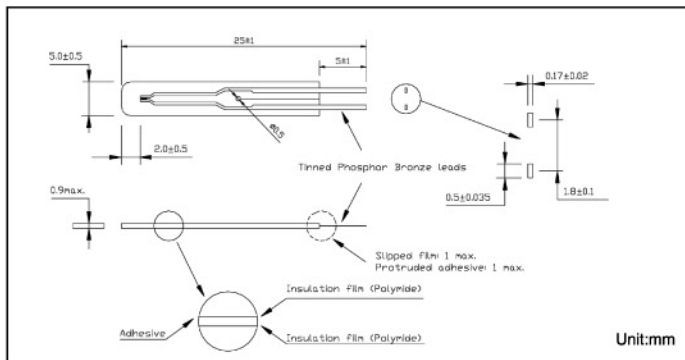


Unit:mm

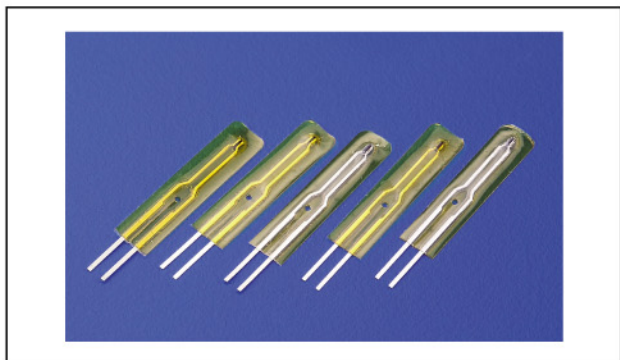

Unit:mm

FEATURES:

- Suitable for narrow space
- Rapid response time
- Elastic and solder easily
- RoHS Compliance
- UL1434 Certification

The TJ thermistor feature ultra thinness of 500 μ m and superior electrical insulation. It is possible to use with safety in ambience that might contact with electrodes.

SPECIFICATIONS

Temperature ranges	-50°C to 90°C	B value:	3435K, 4262K
R₂₅ :		Determined by rated zero-power resistance at 25 °C and 85 °C	
Rated Zero-power	10,000 ohms, 100,000 ohms	R/T curve	F, D curve
resistance value at 25 °C		Tolerances	± 1%
Tolerances	± 1%, ± 3%, ± 5%	Dissipation constant	0.7 mW/ °C in still air
		Thermal time constant	Approx 2 seconds in air
		Maximum power rating	3.5 mW (at 25 °C)

Ordering Map

